



HIGH PERFORMING DUAL PURPOSE DISC-TILLAGE MACHINE



DESIGNED AND ENGINEERED FOR FARMERS, BY FARMERS.
PENETRATE SOIL AT THE IDEAL DEPTH.



ASK OUR EXPERTS

FIND
OUT
MORE



www.k-line.net.au

SAFETY NEVER HURTS!™

Always read the Operators Manual before operating any equipment. Inspect equipment before using it and be sure it is operating properly. Follow the product safety signs and use any safety features provided. CNH Australia reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions, and illustrative material are as accurate as known at time of publication but are subject to change without notice. Availability of some models and equipment builds varies.

© Copyright 2025 CNH America LLC. All Rights Reserved. K-Line Ag and CNH Capital are registered trademarks of CNH America LLC. - We have updated our information notice about privacy ("Privacy Statement") to give you the latest information on how we collect and use your personal data. You can review our updated Privacy Statement by clicking the privacy link on the footer.



The Speedtiller® by K-Line Ag is a versatile, high-performance disc-tilling machine designed to enhance soil conditioning with superior penetration capabilities. It serves dual purposes: mulching and incorporating substantial amounts of crop residue into the soil.

It not only improves soil structure but also boosts the carbon content of the soil, supporting long-term soil health. Speedtiller® is particularly effective in minimising soil erosion caused by wind and water, thanks to its excellent residue incorporation ability, while optimising ground fertility.

Field-proven for efficiency and durability, the Speedtiller Powerflex® handles the job with ease, moves dirt like an offset, and is an excellent finishing tool for levelling and one-pass seedbed preparation.

Ask our experts for a quote.

3 POINT LINKAGE

Model	Operating Width	Tractor Power Range	No. of Discs	Weight	Transport Height	Transport Width	Wheel Equipment
2917D	1.75	70-90	14	1440	1.35	2.05	-
2920D	2	70-90	16	1532	1.35	2.3	-
2922D	2.25	80-100	18	1646	1.35	2.5	-
2925D	2.5	90-120	20	1790	1.35	2.8	-
2930D	3	110-140	24	2048	1.35	3.3	-
2935D	3.5	130-150	28	2356	1.35	3.8	-
2940D	4	150-220	32	2814	1.35	4.3	-
2945D	4.5	210-270	36	3472	1.35	4.8	-

3 POINT LINKAGE WINGS

Model	Operating Width	Tractor Power Range	No. of Discs	Weight	Transport Height	Transport Width	Wheel Equipment
2940F	4 m	210-280 hp	32	3820 kg	3.1 m	2.6 m	-
2945F	4.5 m	230-300 hp	36	4100 kg	3.4 m	2.6 m	-

TRAILING UNIT, UNIVERSAL KIT

Model	Operating Width	Tractor Power Range	No. of Discs	Weight	Transport Height	Transport Width	Wheel Equipment
2917U	1.75	70-85	14	2400	1.65	2.1	11.5/80 x15.3 16 Ply
2920U	2	70-90	16	2500	1.65	2.3	11.5/80 x15.3 16 Ply
2925U	2.5	90-120	20	2990	1.65	2.8	400/60 x15.5
2930U	3	110-140	24	3248	1.65	3.3	400/60 x15.5
2935U	3.5	130-160	28	3456	1.65	3.8	400/60 x15.5
2940U	4	150-220	32	4120	1.65	4.3	400/60 x15.5

TRAILING UNIT, FOLDING WINGS

Model	Operating Width	Tractor Power Range	No. of Discs	Weight	Transport Height	Transport Width	Wheel Equipment
2960T	6 m	220-350 hp	48	6600 kg	3.5 m	2.9 m	400/60 x15.5





HIGH PERFORMANCE DUAL PURPOSE DISC-TILLAGE



DESIGNED AND ENGINEERED FOR FARMERS, BY FARMERS.
PENETRATE SOIL AT THE IDEAL DEPTH.



ASK OUR EXPERTS

FIND
OUT
MORE




www.k-line.net.au

SAFETY NEVER HURTS!™

Always read the Operators Manual before operating any equipment. Inspect equipment before using it and be sure it is operating properly. Follow the product safety signs and use any safety features provided. CNH Australia reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions, and illustrative material are as accurate as known at time of publication but are subject to change without notice. Availability of some models and equipment builds varies.

© Copyright 2025 CNH America LLC. All Rights Reserved. K-Line Ag and CNH Capital are registered trademarks of CNH America LLC. - We have updated our information notice about privacy ("Privacy Statement") to give you the latest information on how we collect and use your personal data. You can review our updated Privacy Statement by clicking the privacy link on the footer.

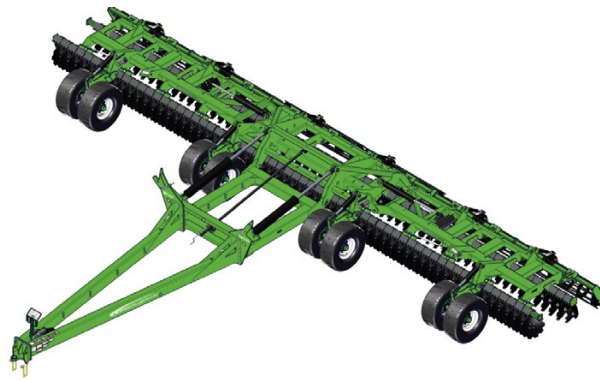

The K-Line Ag Speedtiller Powerflex® is a high-performing, dual-purpose disc-tilling machine designed to deliver superior soil conditioning and residue management. Engineered for farmers who demand efficiency and reliability, the Powerflex® ensures excellent soil penetration, effective weed control, and optimal seedbed preparation—all in a single pass.

Built tough for Australian conditions, the Speedtiller Powerflex® features an exclusive dual-mode operation system. The Rigid Hitch Mode provides deep soil penetration and full disturbance, making it ideal for tough soils and effective residue incorporation. Meanwhile, the Floating Hitch Mode offers precision depth control, ensuring a consistent finish in lighter soils and wetter conditions.

With a robust frame, heavy-duty torsion system, and advanced disc positioning, the Speedtiller Powerflex® outperforms conventional tillage equipment. Its ability to incorporate high levels of crop residue enhances soil health by boosting organic matter and reducing the risk of wind and water erosion.

Whether you're breaking down stubble or preparing for the next planting season, the Speedtiller Powerflex® delivers efficiency, durability, and reliability in every pass.

Benefits

- Rigid and Floating Hitch modes provide flexibility to tackle a wide range of soil conditions with precision.
- Effectively mulches crop residue to enhance soil health and reduce erosion.
- Built with high-strength materials to withstand the toughest conditions and ensure long-term performance.

SPEEDTILLER POWERFLEX® SPECIFICATIONS

Model	Operating Width	Tractor Power Range	No. of Discs	Weight	Transport Height	Transport Width	Wheel Equipment
2940P	4 m	150-200 hp	32	5300 kg	3.7 m	2.5 m	400/60 x 15.5
2945P	4.5 m	160-230 hp	36	5600 kg	3.7 m	2.3 m	400/60 x 15.5
2950P	5 m	170-260 hp	40	5800 kg	3.7 m	2.5 m	400/60 x 15.5
2962P	6.25 m	280-380 hp	50	7500 kg	3.6 m	2.9 m	425/65 x 22.5
2982P	8.25 m	325-410 hp	66	9660 kg	3.6 m	3.2 m	400/60 x 15.5
2995P	9.5 m	360-500 hp	76	12200 kg	4 m	3.85 m	425/65 x 22.5
2912P	12.5 m	425-600 hp	100	17950 kg	4 m	4.8 m	425/65 x 22.5
2915P	15.5 m	550-700 hp	124	22500 kg	4 m	5.8 m	425/65 x 22.5

